

# KR 535 Tabmaster

---



*The KR 535 makes tabbing of paper products faster and easier than ever. Here's why....*

## PERFORMANCE

Just like other KR equipment, the KR 535 performs day in and day out. Production rates in excess of 40k tabs per hour combined with a roll capacity of nearly 50k tabs makes the KR 535 another **real deal** - productive, reliable and simple to operate. The KR 535 is engineered to perform with less operator training and setup time.

## VERSATILITY

All major types of tabs as well as pressure sensitive stamps and labels of various shapes and sizes can be placed on a wide assortment of products. Right or left edge tabbing, bump turn attachments, wide label kits and a folder interface conveyor option makes the KR 535 a **truly flexible system** that can grow with your business.

## VALUE

World-class manufacturing systems are used to help keep costs low. This means **you get more for your dollar with KR tabbing systems**. No other tabbing system matches the performance, versatility and ease of use of a KR 535. Realize a profit and performance edge with the KR 535.



## RUGGED CONSTRUCTION

Designed and built to last by skilled craftsmen, the KR 535 is constructed in the same tradition as all our other mailroom products – **heavy duty**. A straight forward and trouble free design utilizing industry standard motors and controls makes the KR 535 **simple to operate and maintain**. You can count on years of dependable service from your KR 535.

# KR 535

## Tabbing System

### General Specifications

#### Physical

Length	50"	127 cm
Height	70"	178 cm
Width	26"	66 cm
Crated weight	800lbs	363kg
Tabletop height	33"	84 cm

#### Electrical Requirements

Voltage	120 VAC
Current	15 amps
Interface	inkjet base/conveyor interlock

#### Production Rate

Single tab	30k pph
Double tab	30k pph

### Tab Head

#### Physical

Length	29"	74 cm
Height	36.5"	93 cm
Width	14"	35 cm
Crated Weight	120 lbs	54 kgs

#### Material Handling

Min tab: .75" round	Min label: .38"W x .75"L
Max tab: 2.0" round	Max label: 3"W x 2"L STD
Type	opaque, clear or plain paper
Tab roll size	16" diameter (40k of 1"Ø, 50k of .75" Ø)

### Tab Base

#### Physical

Length	50"	113 cm
Height	33"*	84 cm
Width	26"	66 cm
Crated Weight	780 lbs	354 kgs

#### Material Handling


Min stock size	3" x 5"
Max stock size	13" W x 14"L (labeling only) 11"W x 14"L (Tabbing/labeling)
Thickness	Single sheet up to .18" (.62" labeling only)

#### Options


- 5" base height adjustment (Hydra-lift)
- Narrow (1.25") product handling
- 5" wide label kit
- Fan-fold label kit
- Magnetized label kits



*A straightforward operator interface simplifies operator training and setup.*

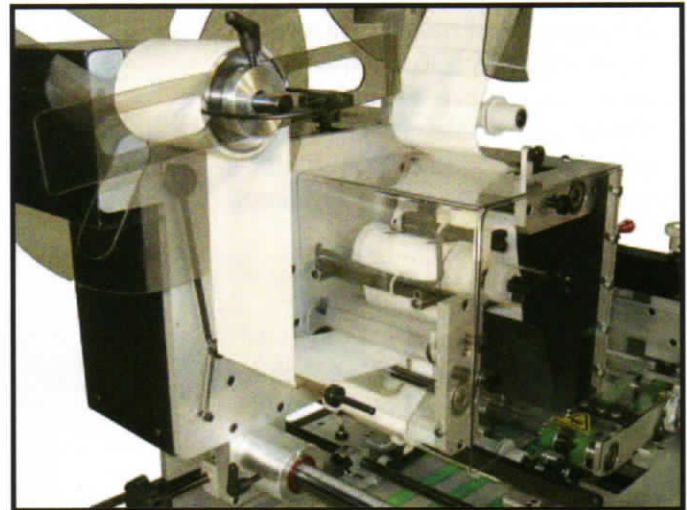

*Run 3" wide labels on the standard KR 535. Even wider labels are possible using the optional 5" wide label kit.*

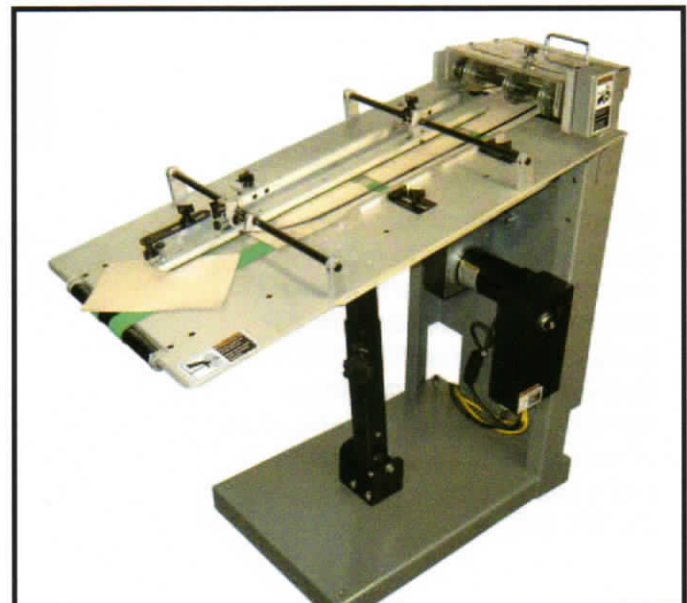

*Run the KR 535 inline with a folder using the KR 415 Folder Interface Conveyor.*

Specifications subject to change without notice. Guards have been removed for clarity. Do not operate machine without guards in place.